6 STORY (28562)

The HMF-28562-RCS is a long boom crane boosting high working speeds. The crane has a compact design as well as fast and easy daily maintenance.

HMF's high quality surface treatment EQC (Environmentally friendly Quality Coating) ensures a particularly sturdy and durable surface, which allows the crane to retain a high re-sale value.

STANDARD FEATURES

- Up to 62' 3" (19 m) of horizontal reach
- Electronic speed adaptation system
- Progressive crane control
- Priority flow control
- Single power plus link arm system
- Proportional control valve PVG 32
- Internal hose routing
- Scanreco radio remote control box
- Electrical options
- Spotlight
- 2 extra valves
- Extra valves in hose guides
- 4 manually controlled available stabilizer functions
- Oil cooler
- Shielding of load-holding valve and jib cylinder

ROTATION SYSTEM

- 420 degree rack and pinion
- Counterbalance valve on each cylinder for added safety during
- Continuous oil bath to reduce friction and enhance life

OVERLOAD SYSTEM

Electronic rated capacity limitation (RCL) 5400 blocks load-in creasing functions when full capacity is attained










CRANE	HORIZONTAL	VERTICAL	MAX. LIFT	HYDRAULIC	OPERATING	MOUNTING	ROTATIONAL	ROTATION
RATING	REACH	REACH	CAPACITY	EXTENSION	WEIGHT	SPACE	TORQUE	
203,967 ft-lb	62′ 3″	71′ 4′′	7100 lbs	35′ 4″	12,013 lbs	44''	35,008 ft-lb	420°
(28.2 tm)	(19m)	(21.8 m)	(3227 kg)	(10.6m)	(5460 kg)	(1118 mm)	(4.8 tm)	



6 STORY (28562)

CAPACITY CHART

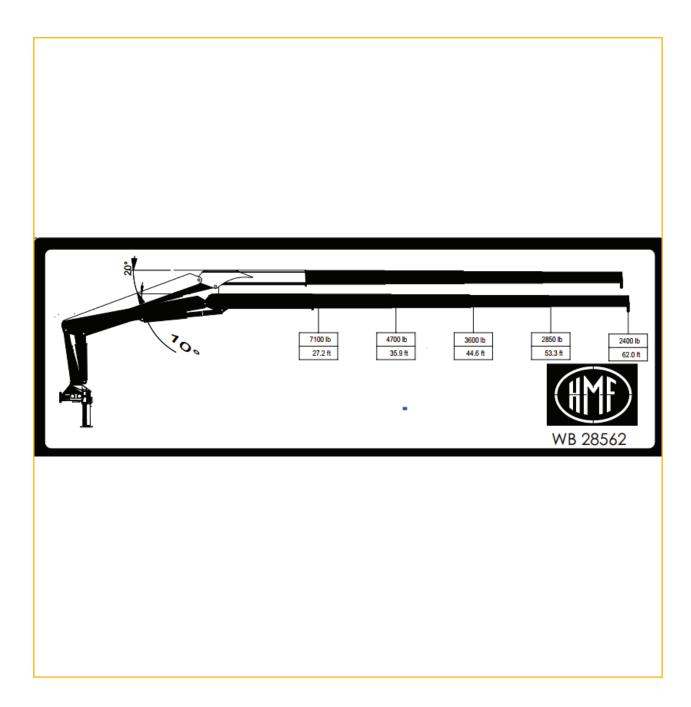

DRIVEPRODUCTS GROUP 5